

# LED Street Light



## Key Features

- Die-cast aluminum housing, excellent heat-dissipation.
- SMD3030 LED chip with long lifespan >100,000hours, 110lm/W.
- Safer isolated driver.
- Ø60mm Light pole mounting diameter.
- Working temperature: -30° C~+50° C.
- IP66 protection class.
- IK10.
- CE, ROHS certificate, LM79 test report.
- Adjustable installation angle 0-90° .

## Applications

Main road, secondary road, highway, elevated road, street, flyover, sidewalk and other road lighting.



## Specifications:



LM-79  
LM-80




RoHS  
Compliant

ISO9001  
ISO14001  
ISO50001

Item	BST-STL-100W-A	BST-STL-150W-A	BST-STL-200W-A
Power	100W	150W	200W
Luminous flux	11000lm	16500lm	22000lm
Dimensions	520*300*100mm	610*300*100mm	690*300*100mm
Input voltage	85-175/220-265VAC		
LED chip	SMD3030 100pcs	SMD3030 150pcs	SMD3030 200pcs
CCT	3000K/4000K/6500K		
Color rendering index(CRI)	Ra>70		
LED driver brand	Lifud/Osram/Meanwell		
Housing color	Gray		
Beam angle	70*140°		
IP rating	IP65		
Housing material	Excellent Aluminum +PC lens		
Working temperature	-20° C ~ +45° C		
Warranty	3 years		

## Size:

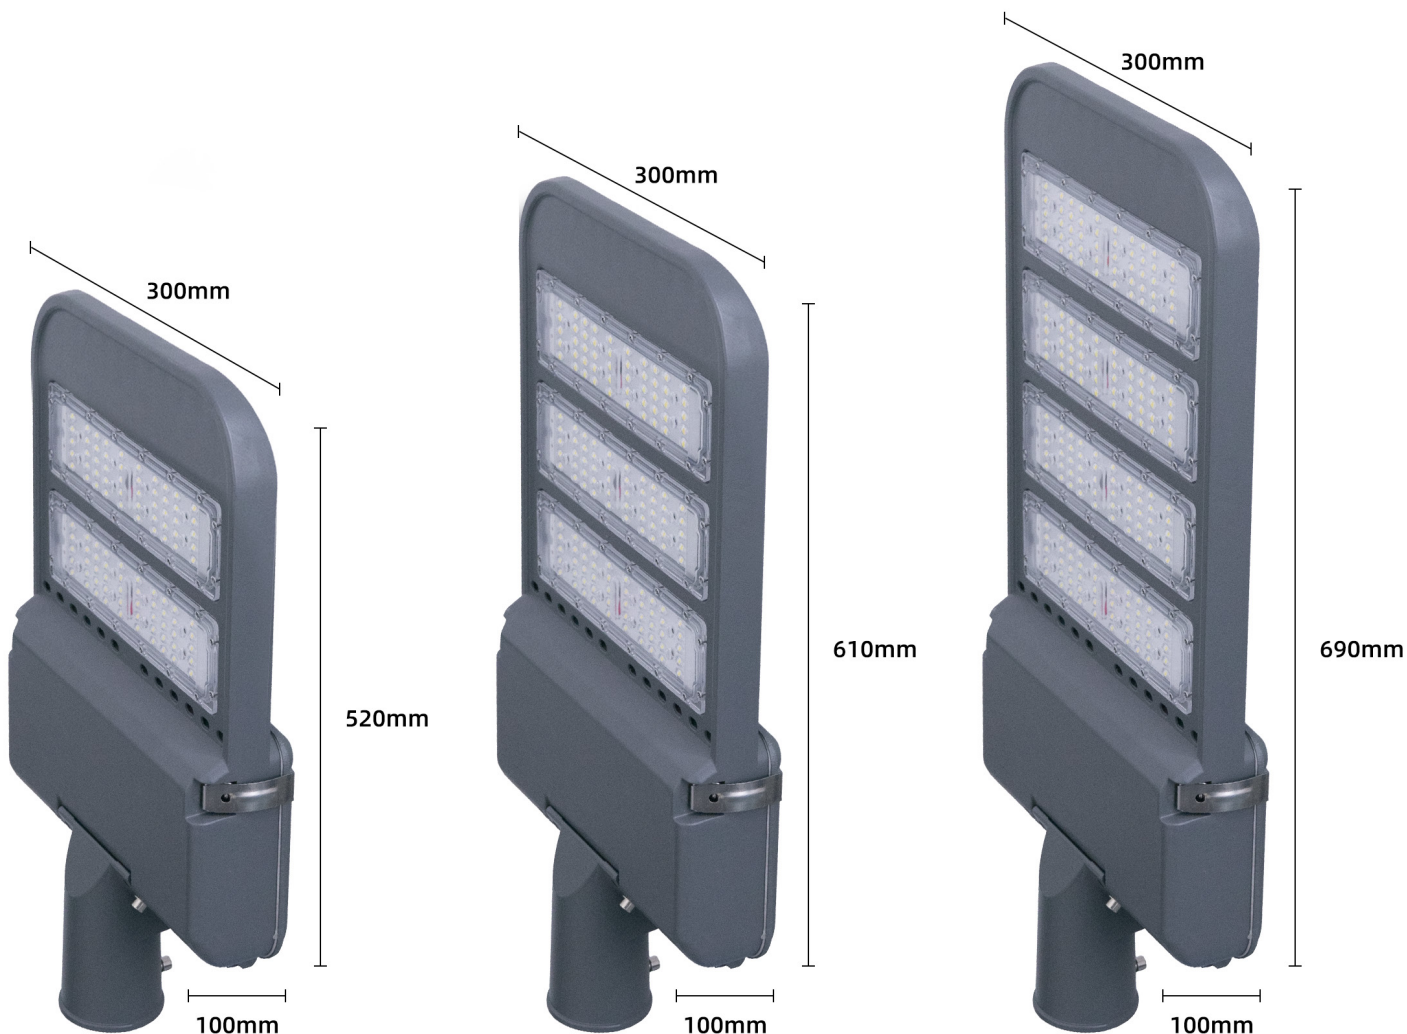

## Packing:

Item	PCS/CTN	G.W	Packing size L*W*H (mm)
BST-STL-100W-A	1	4.2kg	540*310*110mm
BST-STL-150W-A	1	4.7kg	630*310*110mm
BST-STL-200W-A	1	5.5kg	710*310*110mm